

Coloured

RENDER TEXTURE COAT



DUNLOP COLOURED RENDER TEXTURE COAT is a durable acrylic protective texture coating providing a long lasting contemporary decorative finish. With the inclusion of a hydrophobic water repellent additive, the surface is low maintenance with low dirt pick up so surfaces will look better for longer.

USE ON

Fully prepared Brick, Blockwork, Concrete, Blueboard or Compressed Fibre Cement Sheet. For all other substrates call Dunlop Technical Services or review Dunlop Systems Guide at [www.dunlopd iy.com](http://www.dunlopd diy.com).

SURFACE PREPARATION

Clean off dust, oil, grease, salt, mould, release agents, bond-breakers or other contaminants that will interfere with adhesion. Surfaces must be dry. Protect and mask areas not being coated.

Brick, Blockwork or Concrete

B: Apply DUNLOP Multipurpose Acrylic Render to the required thickness.

C: When thoroughly dry, apply DUNLOP Multipurpose Primer and allow to dry.

D: Apply DUNLOP Coloured Render Texture Coat and allow to dry.

Blueboard or Compressed Fibre Cement Sheet*

(Jointing of all FC sheet and blueboard should be carried out as per manufacturer's instructions). Patch, tape and set all recessed joints with DUNLOP Render Joint & Patch and 160gsm Non Adhesive Alkali Resistant Mesh.

B: Apply DUNLOP Multipurpose Primer and allow to dry.

C: Then apply the DUNLOP Coloured Render Texture Coat and allow to dry.

APPLICATION

1: Stir thoroughly before application to evenly disperse texture and colour.


2: Apply one to two even coats depending on preferred coverage by trowel.

3: Working from the bottom, apply evenly over the surface using a hawk and steel trowel. Maintain a wet edge. Allow to firm up for approximately 5–15 minutes depending on ambient conditions and substrate porosity, prior to finishing off with a plastic trowel.

COVERAGE


Coverage will vary depending on substrate and preparation. 12.5L will cover approximately 10m² at 1mm dry film thickness, depending on surface texture and porosity.

Brick, blockwork or concrete

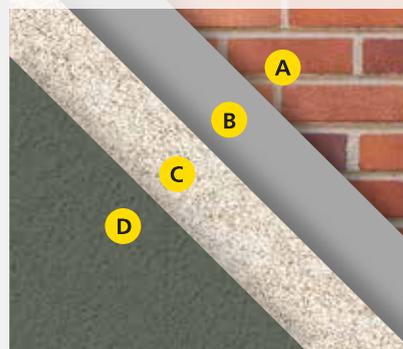

- A** Brick, Blockwork or Concrete
- B** Dunlop Multipurpose Acrylic Render
- C** Dunlop Multipurpose Primer
- D** Dunlop Coloured Render Texture Coat

Blueboard or compressed fibre cement sheet*

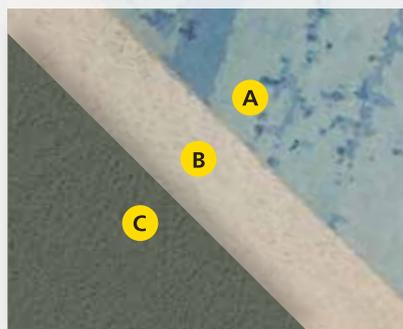

- A** Blueboard or Compressed Fibre Cement Sheet
- B** Dunlop Multipurpose Primer
- C** Dunlop Coloured Render Texture Coat

DRYING

Touch dry in approximately 5 hours and recoat in approximately 24–48 hours based on 23°C and 50% relative humidity. Drying times may vary in cold or humid conditions. Do not apply if windy or the surface and air temperature is under 10°C or over 30°C or if freezing temperatures could occur within 24 hours. Avoid application during the heat of the day, on hot surfaces or in hot windy conditions or when rain is likely within 6-8 hours. Coated areas must be protected from the elements such as rain and frost until fully dried in approximately 48 hours.



Coloured

RENDER TEXTURE COAT

PRECAUTIONS

This product is not suitable for use in areas that are affected by rising damp, hydrostatic pressure or in applications that are continuously immersed.

*Blueboard or Fibre Cement Sheet that is exposed to direct sunlight will require a colour with a LRV (Light Reflectance Value) of more than 40%.

This product is tinted and is non-refundable, so choose your colour carefully. Check the colour is suitable for your requirements before it is applied. For best results and colour consistency, multiple containers should be combined and thoroughly mixed together before starting to ensure colour uniformity. For large projects ensure the same batch is used to ensure colour consistency. As this is a textured product the colour will vary from standard paint colours.

Pails should not be stacked more than three (3) high during transport. For further information contact Dunlop Technical Services or visit www.dunlopdiiy.com.

CLEAN UP

Clean all equipment in water on completion of project.

SAFETY DATA

This product may cause irritation and an allergic reaction to the skin. It may cause serious eye injury and irritation to the respiratory system. In case of contact with the eyes rinse with running water until advised to stop by the Poisons Information Centre or a doctor, or for at least 15 minutes. Wear protective gloves, clothing, eye and face protection. Avoid inhaling dust/fumes/gas/mist/vapours/spray. Ensure adequate ventilation during mixing and application. Store locked up. Check with your local Council regarding the disposal of contents, dispose of packaging thoughtfully and recycle where possible. Keep out of the reach of children. Call the Poisons Information Centre on 131 126 (AUS) and 0800 764 766 (NZ) or call a doctor if you feel unwell. Additional information is in the Safety Data Sheet (SDS) at www.dunlopdiiy.com

DISPOSAL

Do not allow material to enter drains or other watercourses. Absorb spills with sand or other inert material. Unwanted product should be kept in a sealed container, and disposed of via special waste collection services. Check with your local Council regarding the disposal of empty containers.



Coloured

RENDER TEXTURE COAT

10 YEAR GUARANTEE

Ardex Australia Pty Ltd ("we" or "us") guarantees this product (also referred to as "our goods") is free from manufacturing defects and will perform to any applicable specification published by us for 10 years from the date of application of the product if such application occurs within this product's specified shelf life. Our liability under this guarantee is limited at our option to replacement of the product, repair of any damage to the immediate surface or area of application of the product, or the cost of such replacement or repair, in each case if we are satisfied loss or damage was due to a breach of this guarantee. This guarantee does not apply if damage or loss is due to failure to follow our published instructions or any act or circumstance beyond our control, including shade variations and efflorescence and faulty workmanship on the part of any installer or applicator of the product. If you wish to make a claim under this guarantee you must notify us (Address: 7/20 Powers Road Seven Hills NSW 2147; Phone: 1800 222 841; Email: technicalservices@ardexaustralia.com), identify the product and provide evidence of your purchase and the subsequent application of the product within 30 days of any alleged loss or damage occurring. We reserve the right to ask you for satisfactory evidence of any alleged loss or damage and to undertake any inspections and tests necessary to establish your rights under this guarantee. Any claim under this guarantee is at your cost. This guarantee is in addition to any rights or remedies you may have as a "consumer" under the Australian Consumer Law and to that extent you need to be aware that: "Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss of damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure".

DISCLAIMER

The technical details, recommendations and other information contained in this data sheet are given in good faith and represent the best of our knowledge and experience at the time of printing. It is your responsibility to ensure that our products are used and handled correctly and in accordance with any applicable Australian Standards. Our instructions and recommendations are only for the uses they are intended. Users are advised to confirm that this product is suitable for their application and conforms with the specifications of the system being employed and other products in that system. We also reserve the right to update information without prior notice to you to reflect our ongoing research and development program. Country specific recommendations, depending on local standards, codes of practice, building regulations or industry guidelines, may affect specific installation recommendations. The supply of our products and services is also subject to certain terms, warranties and exclusions, which may have already been disclosed to you in prior dealings or are otherwise available to you on request. You should make yourself familiar with them.

This datasheet was issued in October 2019 and is valid for 3 years, unless updated sooner. Always refer to www.dunlopdii.com for the latest technical data from ARDEX Australia Pty. Ltd.